

TS-264 X.21/ISDN ADAPTER




FEATURES

- Enables ISDN-BRI videoconferencing systems to interface with X.21 (56/64 kb/s) service
- Compatible with PictureTel LIVE 50/100/200p/ SwiftSite/Venue 2000™
- Converts two X.21 (56/64 kb/s) lines to an ISDN Basic Rate S/T interface (2B+D)
- Terminates ISDN D-Channel and performs call origination on X.21 lines
- Call termination on X.21 lines and conversion to D-Channel call setup

Permits Videoconferencing in a Non-ISDN Environment

The TS-264 X.21/ISDN ADAPTER allows you to implement many popular ISDN-based videoconferencing systems even if ISDN is not currently available in your area or is difficult to obtain. The TS-264 uses two X.21 lines and adapts the signals for ISDN BRI connection, permitting 2 x 56/64 kb/s videoconferencing. The TS-264 will operate with remote video systems using ISDN, 2x56 or 2x64 video systems.

The TS-264's attractive, compact design allows it to blend into your office environment. Installation is easy. Simply plug in the AC power adapter, connect the two X.21 network lines at the rear panel and the ISDN line to the videoconferencing system.

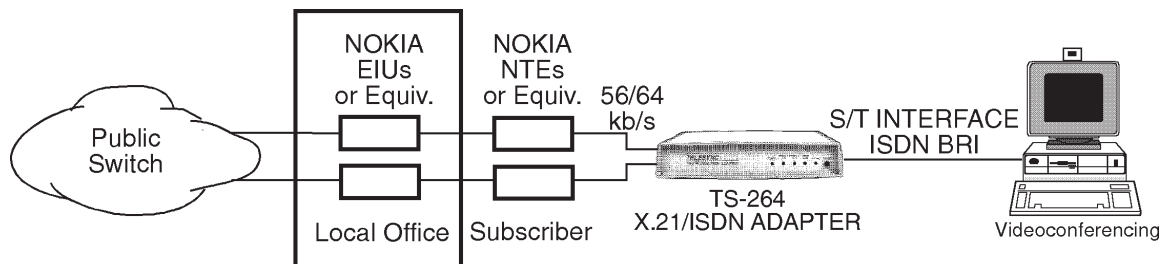

TS-264 X.21/ISDN ADAPTER



TS-264 Rear Panel

SPECIFICATIONS

ISDN S/T Interface: Compatible with PictureTel LIVE 50/100/200p/SwiftSite/Venue 2000™ videoconferencing systems.

TS-264 Network interface is X.21 compatible. Network interface connectors are 15 PIN ISO 4903, 56kb/s or 64kb/s.

RS-232C: DS-9 female, 19,200 baud, 1 stop, 1 start, 8 data bits, and no parity for maintenance data, testing and firmware upgrades

Internal Flash Memory permits the TS-264 to be field upgraded through the RS-232C interface

Power Requirements: 110 Vac, 0.2 amps, wall power adapter or 220Vac, 0.1 amps, wall power adapter.

Dimensions: 1.8"H x 8.25"W x 9.0"D

Operating Temperature: 10-40°C

Certification:

TS-264 X.21/ISDN Adapter - UL Listed
110 Vac power adapter - UL Listed
220 Vac power adapter - CE Mark Listed

ORDERING INFORMATION

TS-264 X.21/ISDN Adapter, 110 Vac, 60 Hz operation. Includes two X.21 cables, one meter in length.

TS-264-1 X.21/ISDN Adapter, 220 Vac, 50/60 Hz operation. Includes two X.21 cables, one meter in length.



The TS-264 X.21/ISDN Adapter is supplied with either a 110 Vac or 220 Vac power adapter. Both units shown.

LIVE 50/100/200p/SwiftSite/Venue 2000 are trademarks of PictureTel.

TELESYNC reserves the right to update the product specifications without notice.

Copyright TELESYNC, Inc., February, 1997

TELESYNC

5555 OAKBROOK PARKWAY • SUITE 110 • NORCROSS, GA 30093
PHONE: (770) 246-9662 • FAX (770) 246-9733 • www.telesync.com